


5090E-19 to 5090E-102
 5090E-19 to 5090E-102
 5090E-19 to 5090E-102

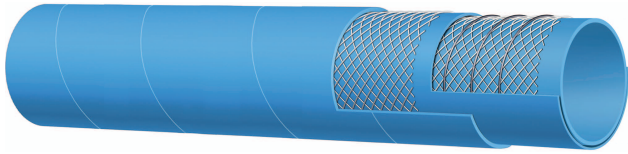

Specification

Application:

5090E-19 to 5090E-102
 5090E-19 to 5090E-102

Technical Description:

Inner Tube: 5090E-19 to 5090E-102
 5090E-19 to 5090E-102

Reinforcement: 5090E-19 to 5090E-102
 5090E-19 to 5090E-102

Temperature Range: -10°C to +50°C. Depending on conveyed chemical.

Standard: FDA - EU 10/2011 A+B+C+D2

Advantages:

- Abrasion and ozone resistant cover.

PRODUCT CODE	HOSE ID mm	HOSE OD mm	WORKING PRESSURE BAR	BURSTING PRESSURE BAR	BENDING RADIUS mm	WEIGHT kg/m
5090E-19	19	31.0	16	48	114	0.59
5090E-25	25	37.0	16	48	150	0.73
5090E-32	32	44.0	16	48	192	0.88
5090E-38	38	50.0	16	48	228	1.01
5090E-40	40	52.0	16	48	240	1.05
5090E-51	51	63.0	16	48	300	1.34
5090E-63	63	77.0	16	48	378	2.09
5090E-76	76	92.0	16	48	450	2.84
5090E-102	102	118.0	16	48	600	3.87

Specifications can be subject to change; data is correct at the time of production. Please contact the sales office for specific enquiries.