


## HOT WATER & STEAM

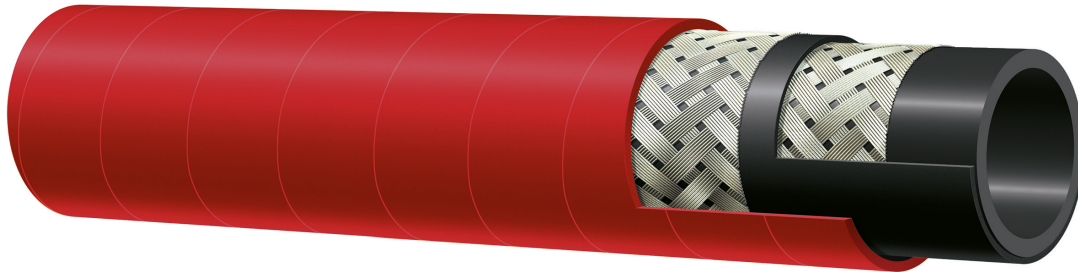

EXTRUDED  
TUBE

### 340AH

#### Steam 18 bar (270 psi) - Steel braided

**Tube:** black conductive EPDM.

**Reinforcement:** one or two high tensile steel wire braids.

**Cover:** red EPDM - heat, abrasion and ozone resistant - pin pricked.

**Application:** saturated and superheated steam.

**Constant operation:** -40 °C +210 °C (-40 °F +410 °F)  
intermittent to 232 °C (450 °F)

ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	WP (psi)	BP (bar)	BP (psi)	BR (mm)	BR (in)	Weight (kg/m)	Weight (lb/ft)
13,0	1/2"	23,0	0,91	18	270	180	2700	130	5,12	0,390	0,27
16,0	5/8"	26,0	1,02	18	270	180	2700	160	6,30	0,470	0,32
19,0	3/4"	31,0	1,22	18	270	180	2700	190	7,48	0,800	0,54
25,0	1"	38,0	1,50	18	270	180	2700	250	9,84	1,040	0,70
32,0	1 1/4"	46,0	1,81	18	270	180	2700	320	12,60	1,360	0,92
38,0	1 1/2"	52,0	2,05	18	270	180	2700	380	14,96	1,540	1,04
51,0	2"	67,0	2,64	18	270	180	2700	510	20,08	2,380	1,60
63,0	2 1/2"	81,0	3,19	18	270	180	2700	630	24,80	3,240	2,18
76,0	3"	94,0	3,70	18	270	180	2700	760	29,92	4,250	2,86