


PRESSURE WASH

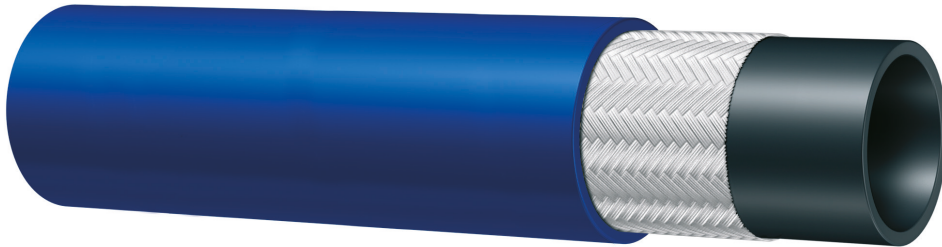

ULTRAJET 200

Tube: oil resistant synthetic rubber.

Reinforcement: one high tensile textile braid.

Cover: abrasion, ozone and hydrocarbon resistant synthetic rubber.

Application: specially designed for professional and industrial high pressure cleaning.
Antimicrobial protection.

Temperature: -40 °C +121 °C (-40 °F +250 °F)

Length: fixed and random

Part Number	ID (dash)	ID (mm)	ID (in)	OD (mm)	OD (in)	WP (Mpa)	WP (psi)	BP (Mpa)	BP (psi)	BR (mm)	BR (in)	Weight (kg/m)	Weight (lb/ft)
8V4AE010	10	10,0	3/8"	19,0	0,7	20,0	2900	50,0	7250	25	0,98	0,242	0,16
8V4AE012	12	13,0	1/2"	20,7	0,81	20,0	2900	50,0	7250	100	3,94	0,281	0,19