


## Petrochemical/Oil

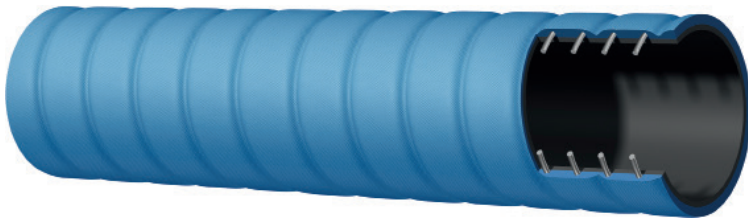

### 606AE

#### Tank truck 10 bar (150 psi) - Corrugated - Low temperature

**Tube:** black conductive NBR.

**Reinforcement:** high tensile textile cords with embedded steel helix wire.

**Cover:** blue CR - abrasion, ozone and hydrocarbon resistant.

**Application:** fuel, oil and hydraulic fluids suction and delivery. Specially designed for tank truck applications where extreme flexibility at low temperatures is required.

**Constant operation:** -54 °C +82 °C (-65 °F +180 °F)

↔		↔		⬇		⬆		⤴		⏚		
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
51,0	2"			10	150	30	450	76,0	2,99	100	1,540	1,04
76,0	3"			10	150	30	450	114,0	4,49	100	2,680	1,81
102,0	4"			10	150	30	450	153,0	6,02	100	3,910	2,63

Specifications can be subject to change; data is correct at the time of production. Please contact the sales office for specific enquiries.