


620AA Fuel Oil Hose 20Bar

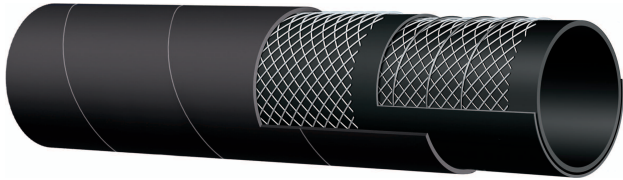

Specification

Application:

Developed for fuel and oil suction and delivery. Designed for long service life in heavy duty applications.

Technical Description:

Inner Tube: Black conductive NBR.

Reinforcement: High tensile textile cords with embedded steel helix wire - antistatic wire.

Cover: Black CR - abrasion, ozone and hydrocarbon resistant.

Temperature Range: -30°C to +80°C.

Advantages:

- Designed for long service life in heavy duty applications.

PRODUCT CODE	HOSE ID mm	HOSE OD mm	WORKING PRESSURE BAR	BURSTING PRESSURE BAR	BENDING RADIUS mm	WEIGHT kg/m
620AA-51	51	63.0	20	60	204	1.65
620AA-63	63	77.0	20	60	252	2.14
620AA-76	76	90.0	20	60	304	2.62
620AA-102	102	116.0	20	60	408	3.58
620AA-127	127	145.0	20	60	508	6.09
620AA-152	152	170.0	20	60	608	8.25
620AA-203	203	225.0	20	60	812	12.31

Specifications can be subject to change; data is correct at the time of production. Please contact the sales office for specific enquiries.