


Offshore

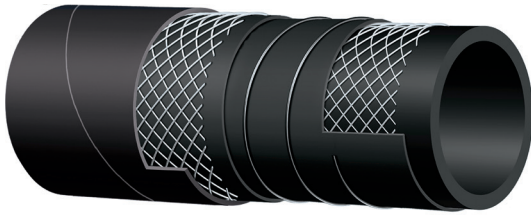

648AA

Rig supply soft wall - Fuel-liquid mud 20 bar (300 psi)

Tube: black conductive NBR.

Reinforcement: high tensile textile cords - antistatic wire.

Cover: black conductive CR - abrasion, ozone, hydrocarbon and fire resistant.

Application: fuel, oil and liquid mud transfer from supply vessels to offshore platforms.

Also suitable for sea water pumping and barite transfer.

Specially designed for reeling applications and weak link couplings use.

Tensile end load resistance:

ID 2" 2.000 kg

ID 3" 4.000 kg

ID 4" 7.000 kg

ID ≥ 5" 10.000 kg

ABS Type approved hose assemblies.

Electrically continuous.

Constant operation: -30 °C +90 °C (-22 °F +194 °F)

↔		↔		↻		↻		⤴		⌋	⏺	
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
51,0	2"	67,00	2,64	20	300	80	1200	306,0	12,05		1,880	1,27
76,0	3"	94,00	3,70	20	300	80	1200	456,0	17,95		2,950	1,99
102,0	4"	120,00	4,72	20	300	80	1200	612,0	24,09		3,900	2,63
127,0	5"	147,00	5,79	20	300	80	1200	762,0	30,00		5,640	3,80
152,0	6"	176,00	6,93	20	300	80	1200	912,0	35,91		8,030	5,40

Specifications can be subject to change; data is correct at the time of production. Please contact the sales office for specific enquiries.