


## Offshore

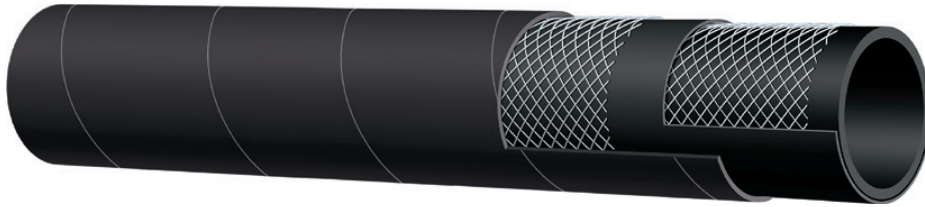

### 650AA

#### Fuel-oil delivery 10 bar (150 psi)

**Tube:** black conductive NBR.

**Reinforcement:** high tensile textile cords.

**Cover:** black conductive CR - abrasion, ozone, hydrocarbon and fire resistant.

**Application:** general purpose fuel and oil delivery.

**Constant operation:** -30 °C +80 °C (-22 °F +176 °F)

mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
19,0	3/4"	29,00	1,14	10	150	30	450				0,450	0,31
25,0	1"	35,00	1,38	10	150	30	450				0,570	0,39
32,0	1 1/4"	42,00	1,65	10	150	30	450				0,700	0,48
32,0	1 1/4"	44,00	1,73	10	150	30	450				0,860	0,58
35,0	1 3/8"	47,00	1,85	10	150	30	450				0,940	0,64
38,0	1 1/2"	48,00	1,89	10	150	30	450				0,820	0,56
38,0	1 1/2"	50,00	1,97	10	150	30	450				1,000	0,68
40,0	1 9/16"	52,00	2,05	10	150	30	450				1,050	0,71
45,0	1 3/4"	57,00	2,24	10	150	30	450				1,170	0,79
51,0	2"	61,00	2,40	10	150	30	450				1,090	0,74
51,0	2"	63,00	2,48	10	150	30	450				1,320	0,89
63,0	2 1/2"	75,00	2,95	10	150	30	450				1,600	1,08
76,0	3"	88,00	3,46	10	150	30	450				1,930	1,30
102,0	4"	114,00	4,49	10	150	30	450				2,610	1,76

Specifications can be subject to change; data is correct at the time of production. Please contact the sales office for specific enquiries.