


Petrochemical/Oil

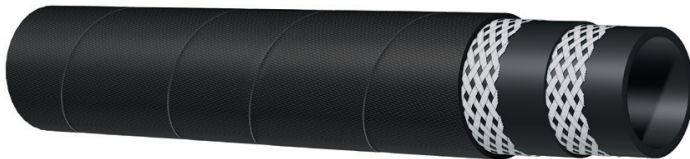

658AA

Domestic fuel reeling 16 bar (240 psi) - Textile braided
EN 1360/1 - TRbF 131/2

Tube: black conductive NBR.

Reinforcement: high tensile textile braids.

Cover: black conductive CR - abrasion, ozone, hydrocarbon and fire resistant.

Application: fuel and oil delivery in heavy duty reeling applications. Also suitable for tank cleaning.

Antistatic wire available on request.

Constant operation: -30 °C +70 °C (-22 °F +158 °F)

↔		↔		⬇		↔		⤴		⌘	⚖	
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
25,0	1"	37,00	1,46	16	240	48	720	125,0	4,92		0,660	0,45
32,0	1 1/4"	44,00	1,73	16	240	48	720	160,0	6,30		0,790	0,54
35,0	1 3/8"	47,00	1,85	16	240	48	720	175,0	6,89		0,850	0,58
38,0	1 1/2"	51,00	2,01	16	240	48	720	190,0	7,48		1,030	0,70
51,0	2"	67,00	2,64	16	240	48	720	255,0	10,04		1,720	1,16

Specifications can be subject to change; data is correct at the time of production. Please contact the sales office for specific enquiries.