


Chemical

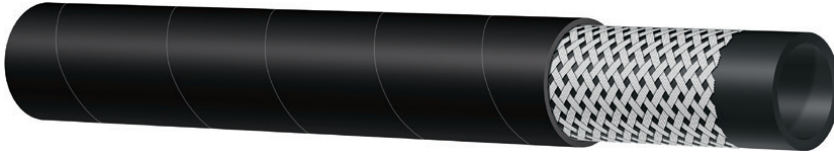

955AA

DEF urea solution 20 bar (300 psi) - Textile braided

Tube: black conductive sulphur free EPDM.

Reinforcement: high tensile textile wire braids.

Cover: black conductive EPDM - abrasion and ozone resistant.

Application: Diesel Exhaust Fluid/AUS32 urea solution dispensing and transfer.

Tested according to ISO 22241-2 to guarantee high purity of the dispensed solution.

Constant operation: -40 °C +100 °C (-40 °F +212 °F)

↔		↔		↻		↻		⤴		⏹		⏹	
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft	
13,0	1/2"	23,00	0,91	20	300	60	900	91,0	3,58		0,290	0,20	
16,0	5/8"	26,00	1,02	20	300	60	900	112,0	4,41		0,340	0,23	
19,0	3/4"	29,00	1,14	20	300	60	900	133,0	5,24		0,390	0,27	
25,0	1"	35,00	1,38	20	300	60	900	175,0	6,89		0,490	0,33	

Specifications can be subject to change; data is correct at the time of production. Please contact the sales office for specific enquiries.