


## General Purpose

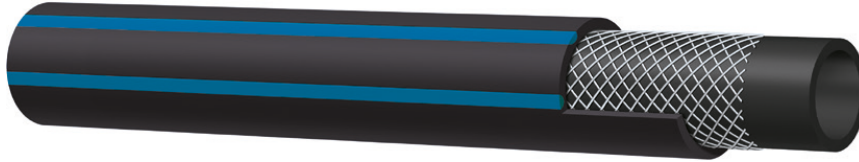

### 973AA

#### General purpose 20 bar (300 psi) - EPDM - Heavy Duty - Conductive

**Tube:** black conductive EPDM.

**Reinforcement:** high tensile textile cords.

**Cover:** black conductive EPDM with longitudinal blue stripes - abrasion and ozone resistant.

**Application:** nitrogen, air, water and mild chemical delivery in general industrial applications.

Suitable for use in potentially explosive environments.

**Temperature:** -40 °C +100 °C (-40 °F +212 °F)

**Note:** Also available with Yellow, Green, or Solid Black covers; ID availability in these colours includes: 1/2, 3/4, & 1 inch (").

SAP code	ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	WP (psi)	BP (bar)	BP (psi)	BR (mm)	BR (in)	Weight (kg/m)	Weight (lb/ft)	Length (m)
2016841	6,0	1/4"	13,00	0,51	20	300	80	1200	60	2,36	0,140	0,10	60,0
2016842	8,0	5/16"	15,00	0,59	20	300	80	1200	75	2,95	0,180	0,13	60,0
2016843	10,0	3/8"	17,00	0,67	20	300	80	1200	90	3,54	0,225	0,16	60,0
2016837	13,0	1/2"	21,00	0,83	20	300	80	1200	110	4,33	0,320	0,22	60,0
2016839	16,0	5/8"	25,00	0,98	20	300	80	1200	140	5,51	0,410	0,28	60,0
2016838	19,0	3/4"	29,00	1,14	20	300	80	1200	160	6,30	0,580	0,39	60,0
2016840	25,0	1"	36,00	1,42	20	300	80	1200	210	8,27	0,720	0,49	60,0

Specifications can be subject to change; data is correct at the time of production. Please contact the sales office for specific enquiries.