


Flexor 2SN/R2AT Minetuff Hydraulic Hose

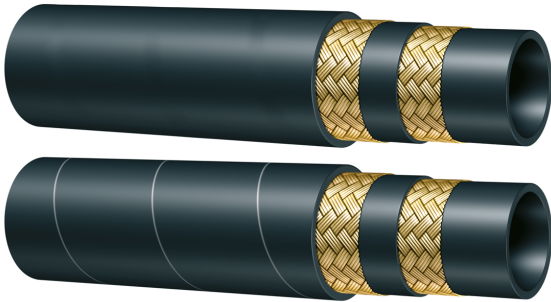

Specification

Application:

Designed for high pressure hydraulic lines, fuel oil, antifreeze solutions, air and water.

Technical Description:

Inner Tube: Oil resistant synthetic rubber.

Reinforcement: Two high tensile steel braids.

Cover: Smooth up to 1", wrapped over 1". Abrasion, ozone and hydrocarbon resistant synthetic rubber.

Temperature Range: -40°C to +100°C.

Standard / Approval: MSHA. ISO 1436-1 - SAE 100 R2AT - EN 853 2SN

Length: Random up to 1" - 61 m max over 1 1/4"

Advantages:

- Abrasion, ozone and hydrocarbon resistant synthetic rubber.
- Designed for high pressure hydraulic lines.

PRODUCT CODE	ID			OD		WORKING PRESSURE		MIN. BURSTING PRESSURE		MIN. BENDING RADIUS	WEIGHT
	-size	mm	Ins	mm	Ins	PSI	Bar	PSI	Bar	mm	kg/m
1002467	-04	06	1/4	14.2	0.56	5850	400	23200	1600	100	0.330
1002468	-05	08	5/16	15.8	0.62	5000	350	20000	1400	115	0.353
1002469	-06	10	3/8	18.2	0.72	4800	330	19200	1320	125	0.463
1002470	-08	13	1/2	21.3	0.84	4000	275	16000	1100	175	0.530
1002471	-10	16	5/8	24.5	0.96	3630	250	14500	1000	200	0.663
1002472	-12	19	3/4	28.6	1.13	3120	215	12500	860	240	0.852
1002473	-16	25	1	36.6	1.44	2400	165	9600	660	300	1.224
1002498	-20	32	1 1/4	46.0	1.81	1820	125	7280	500	420	1.769
1002474	-24	38	1 1/2	52.8	2.08	1310	90	5240	360	500	2.030
1002475	-32	51	2	65.6	2.58	1200	80	4640	320	630	2.760

Specifications can be subject to change; data is correct at the time of production. Please contact the sales office for specific enquiries.