



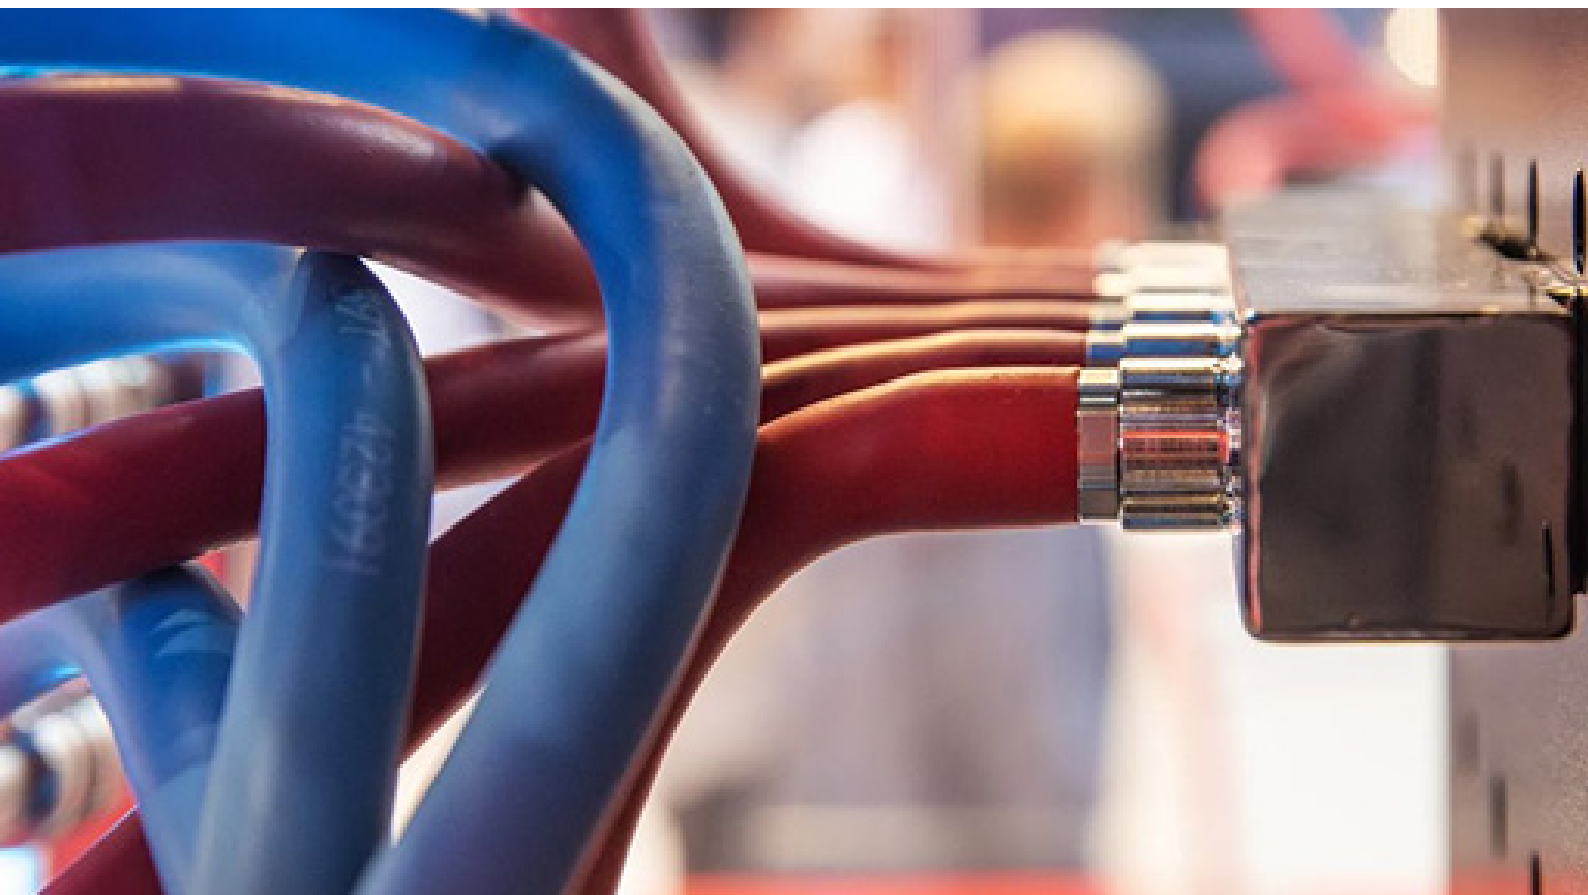

// 959AA DATA CENTRE COOLING

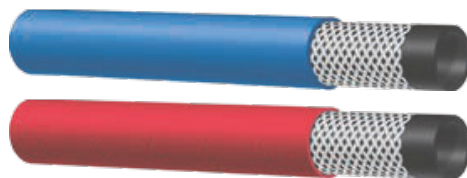

// 959 AUTOLOCK EVOLUTION EPDM HOSE

The 959 Autolock Evolution EPDM hose range is specifically designed to guarantee long service life, maximum safety, and ease of use in data center water cooling applications.

FEATURES

- ▲ The peroxide cured, calcium and zinc free, EPDM tube guarantees high purity of the cooling solutions
- ▲ The braided construction ensures superior kink resistance and tight bend radius for easy installation and replacement
- ▲ The UL 94 V0 flame resistant cover ensures maximum reliability
- ▲ Available with blue and red cover
- ▲ Compatible with push-on fittings

// 959 - AUTOLOCK EVOLUTION EPDM



EXTRUDED
TUBE

SMOOTH
COVER

Water cooling

UL 94 V0

Tube: black peroxide cured EPDM. **Reinforcement:** high tensile textile braids. **Cover:** blue (959AE) and red (959AH) EPDM - abrasion, ozone and fire resistant.

Application: data center water cooling.

Compatible with push-on fittings.

Temperature: -40 °C +120 °C (-40 °F +248 °F)



ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	WP (psi)	BP (bar)	BP (psi)	BR (mm)	BR (in)	Weight (kg/m)	Weight (lb/ft)
6,0	1/4"	15,0	0,59	20	300	60	900	36	1,42	0,190	0,13
10,0	3/8"	19,0	0,75	20	300	60	900	60	2,36	0,270	0,19
13,0	1/2"	22,0	0,87	20	300	60	900	78	3,07	0,330	0,23

