


// UNIVERSAL QUICK-CONNECT COUPLINGS – UQD SERIES

The Alfagomma **UQD quick-connect coupling series** is an essential component for water cooling systems in data centres. With a focus on **secure and easy connections, leak-proof design, high flow rates,** and **resistance to mechanical stresses**, it is tailored to meet the rigorous demands of data centre water cooling.

FEATURES

- ▲ Flat face design
- ▲ Stainless steel
- ▲ EPDM seal material
- ▲ 100% helium leak tested
- ▲ Color coding available
- ▲ Sizes: 1/4" to 5/8"




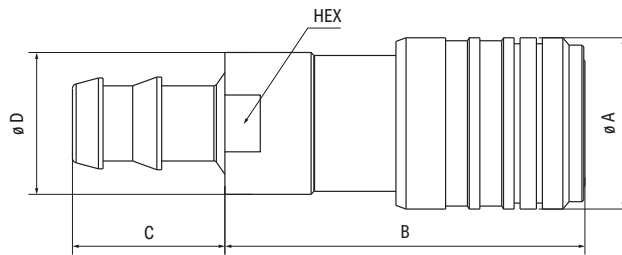

UQD QUICK CONNECT

Push-on Female


UQD	Product Code	End size / Hose Tail (in)	A (mm)	A (in)	B (mm)	B (in)	C (mm)	C (in)	D (mm)	D (in)	HEX (mm)	HEX (in)
UQD02	HZ223S10-040400	1/4	22,0	0,87	46,4	1,83	19,0	0,75	15,5	0,61	14,0	0,55
UQD04	HZ223S10-060600	3/8	26,5	1,04	61,0	2,40	22,0	0,87	19,9	0,78	19,0	0,75
UQD06	HZ223S10-080800	1/2	29,0	1,14	61,0	2,40	25,6	1,00	23,9	0,94	22,0	0,87

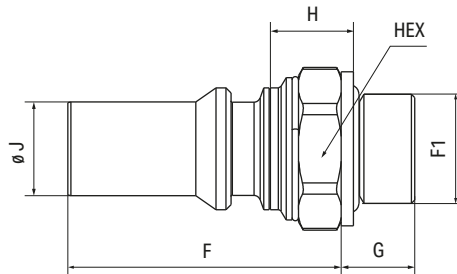

UQD QUICK CONNECT

Male BSP ISO1179-3

UQD	Product Code	Thread F1 (in)	E (mm)	E (in)	F (mm)	F (in)	G (mm)	G (in)	H (mm)	H (in)	J J (mm)	J (in)	HEX (mm)	HEX (in)
UQD02	HZ210510-040200	1/8	16,8	0,66	30,4	1,20	8,1	0,32	13,5	0,73	6,6	0,26	15,0	0,59
UQD04	HZ210510-060600	3/8	24,6	0,97	38,2	1,51	11,2	0,44	10,6	0,86	11,1	0,44	22,0	0,87
UQD06	HZ210510-080600	3/8	24,6	0,97	41,8	1,65	11,1	0,44	11,0	0,86	14,3	0,56	22,0	0,87

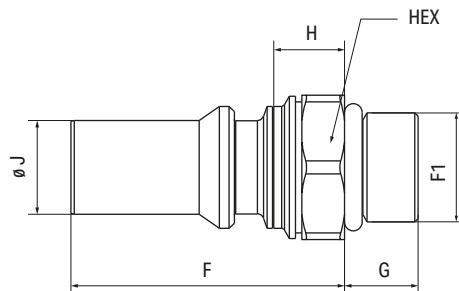

UQD QUICK CONNECT

Male ORB ISO 11926-3

UQD	Product Code	Thread F1 (in)	E (mm)	E (in)	F (mm)	F (in)	G (mm)	G (in)	H (mm)	H (in)	J (mm)	J (in)	HEX (mm)	HEX (in)
UQD02	HZ213010-040400	7/16-20	17,3	0,68	29,3	1,154	9,1	0,36	13,5	0,73	6,6	0,26	14,0	0,55
UQD04	HZ213010-060600	9/16-18	19,6	0,77	38,2	1,50	11,1	0,44	10,6	0,86	11,1	0,44	17,0	0,67
UQD06	HZ213010-080800	3/4-16	24,6	0,97	41,8	1,65	11,0	0,44	11,0	0,86	14,3	0,56	22,0	0,87