




// 313AA DATA CENTRE COOLING

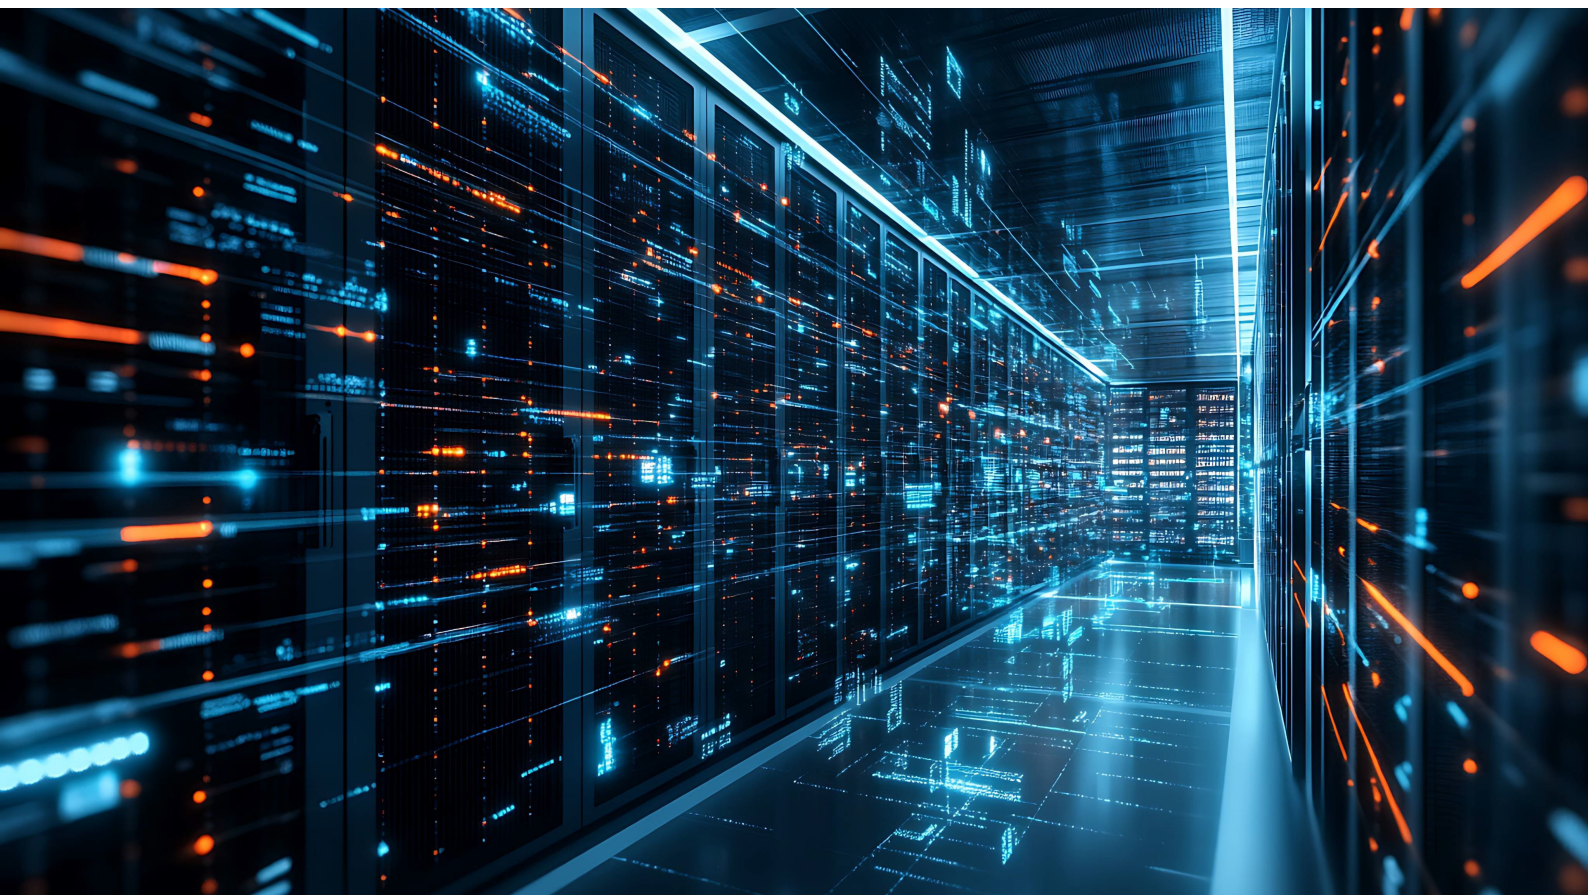

 **ALFAGOMMA** GROUP

// ALFAGOMMA 313AA LIQUID COOLING HOSE



Liquid cooling 10 bar (150 psi) - EPDM - Hard wall UL 94 V0

Tube: black peroxide cured EPDM - calcium and zinc free.


Reinforcement: high tensile textile cords with embedded steel helix wire.

Cover: black EPDM - abrasion, ozone and flame resistant according to UL94 V0.

Application: Liquid cooling in applications where tight bend radius is required.

Constant operation: -40 °C +120 °C (-40 °F +248 °F)

ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	WP (psi)	BP (bar)	BP (psi)	BR (mm)	BR (in)	Vacuum %	Weight (kg/m)	Weight (lb/ft)
25,0	1"	36,0	1,42	10	150	40	600	50	1,97	100,00	0,780	0,53
32,0	1 1/4"	44,0	1,73	10	150	40	600	64	2,52	100,00	1,010	0,68
38,0	1 1/2"	50,0	1,97	10	150	40	600	76	2,99	100,00	1,180	0,80
51,0	2"	64,0	2,52	10	150	40	600	102	4,02	100,00	1,750	1,18

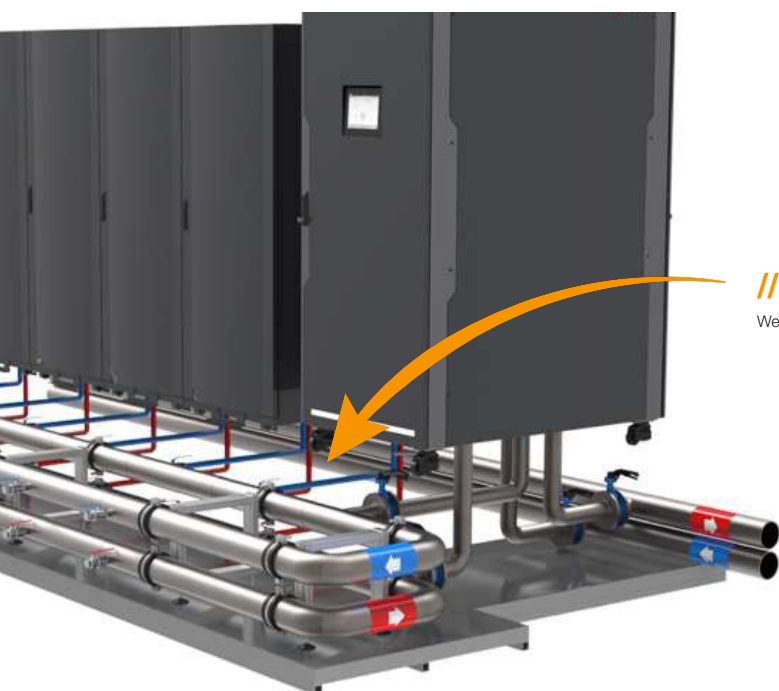

// ALFAGOMMA 313AA

We also provide the Alfangomma 959AA and 956AA alternative.

// IN RACK SOLUTIONS

In rack we recommend the 959AA and the 956AA, visit kiowa.uk/data-centres for more information



KIOWA SLEAFORD (HQ)
T: 01529 416200
E: sales@kiowa.co.uk
www.kiowa.uk

ASK FOR YOUR LOCAL BRANCH
Teesside, Newcastle, Glasgow, Aberdeen

Shop Online: www.kiowa.co.uk

ALFAGOMMA GROUP